

Drop

HDCP compliant wall mount monitors



Brushed stainless steel



Aluminum



Glass

Highlights

- Specially designed for on-wall installation
- Easy to install
- Different finishes: Brushed stainless steel, Aluminum or Glass
- Galvanized in-wall mounting box
- Security anti-theft locking system
- 24/7 design
- Maintenance free
- Energy saving design, low consumption video controller

General

Arthur Holm Drop monitors offer a wide range of sizes and finishes of aluminum, stainless steel or glass. They can be personalized by adding different features and the logo of the customers. They have been designed with a professional approach and provide all the accessories for a quick, straight forward and secure installation. Integrating monitors flush in the wall is a convenient space optimising solution specially conceived to enhance the user experience. When installed in reception and public areas inside hotels, office and commercial buildings, museums and visitor or business centres, they become a part of a friendly eye-catching space providing positive feelings to visitors.

Wall mount monitors can be discreetly installed on the wall and deliver convenient information, as well as personalized welcome messages or corporate presentations.

Wall monitors are also ideal to offer relevant meetings information when placed outside a conference or purpose-built room, a place where they will undoubtedly catch the eye of the public. They can show details about the session taking place inside, being extremely helpful and engaging for attendees to know schedules, programmes or other general information of interest.

Display

Size	Full HD 17.3" TFT Active Matrix
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80° (u/d)/80°/80°(l/r)
Viewing area	381.888 (h) x 214.812 (v)
LED backlight lifespan	50,000 hrs
Response time	Tr 37 ms, Tf 3ms
Temperature (operating/storage)	Operating 0°C ~+40°C Storage -20°C ~+60°C

Materials

Monitor housing	Available with front in aluminum (A), stainless steel (I), or glass (G)
-----------------	---

Connectivity

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
--------------	--

Electrical

External power supply	100-240 Vac, 47/63Hz, 12Vdc
Power consumption	70W

Mechanical

Monitor Dimensions	463 x 296 x 73.5 mm [18.23" x 11.65" x 2.89 "]
Weight	5.2 Kg / 11.4 Lbs (Stainless Steel & Aluminum)
	5.7 Kg / 12.5 Lbs (Glass)
Shipping Dimensions:	
Weight	6.2 Kg / 13.6 Lbs (Stainless Steel & Aluminum)
	6.7 Kg / 14.7 Lbs (Glass)
Shipping Box	570 x 480 x 320 mm [22.44" x 18.89" x 12.59"]

Options

- Laser engraved logo
- Projected capacitive multi-touch screen
- Built-in fan less industrialPC board
- RS-232 serial port

Certifications

- CE
- FCC
- IEC60950


Consultants, architects and engineers specifications

The monitor shall provide a a front frame made of stainless steel, aluminum or glass. The monitor shall provide a separated galvanized box for in-wall fix installation and a monitor clip-on-front system. The 17.3" Full HD monitor shall have a brightness of 400 cd/m2, a contrast ratio of 1000:1 and a backlight lifespan of 50,000 hours. The monitor shall provide 2/ DVI inputs by a licensed HDCP manufacturer.

Warranty



- 2 years general warranty

Connectivity Panel

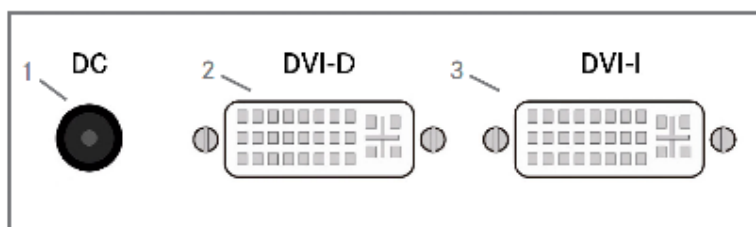

CONNECTIVITY

- 1- Power input
- 2- DVI 2 video input
- 3- DVI 1/ DVI A video input

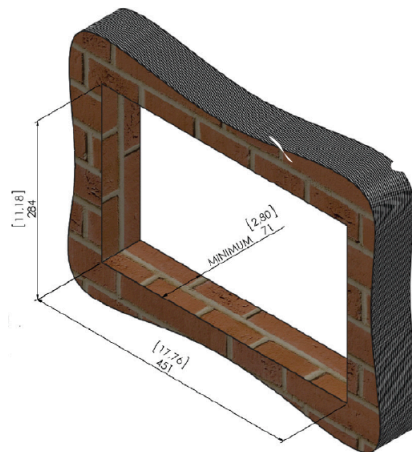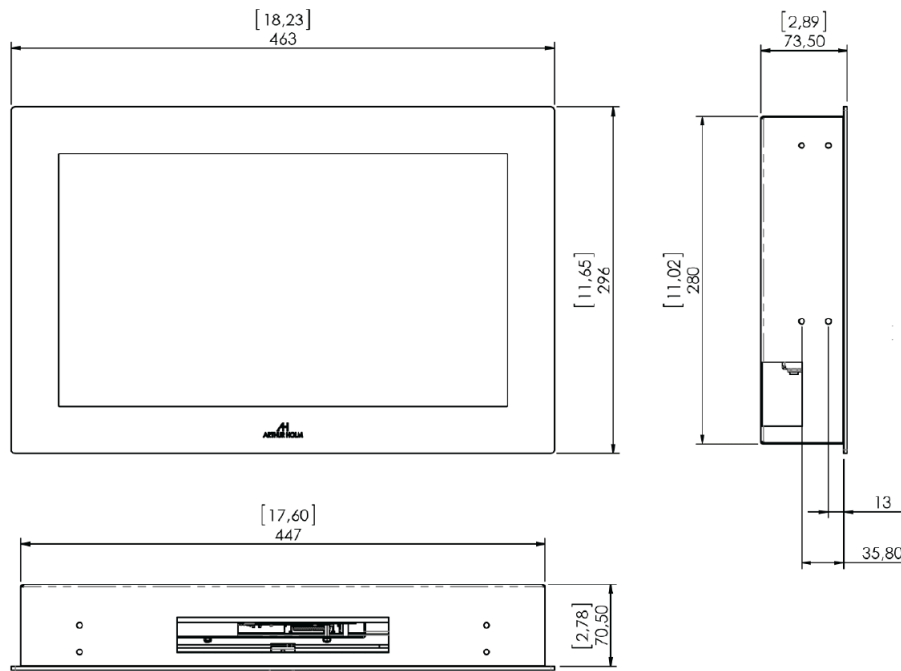

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design